



Fiserv DNA SAF Server

Deployment Guide

UPDATED: 22 March 2021



Copyright Notices

Copyright © 2002-2021 Kemp Technologies, Inc. All rights reserved. Kemp Technologies and the Kemp Technologies logo are registered trademarks of Kemp Technologies, Inc.

Kemp Technologies, Inc. reserves all ownership rights for the LoadMaster and Kemp 360 product line including software and documentation.


Used, under license, U.S. Patent Nos. 6,473,802, 6,374,300, 8,392,563, 8,103,770, 7,831,712, 7,606,912, 7,346,695, 7,287,084 and 6,970,933

Table of Contents

1 Introduction	4
2 Template	5
3 Fiserv DNS SAF Virtual Service	6
3.1 Create the Fiserv DNS SAF Virtual Service	6
3.1.1 Fiserv DNA SAF Virtual Service Recommended API Settings (optional)	7
Last Updated Date	8

1 Introduction

This guide details the steps required to configure a load balanced Fiserv DNA[®] SAF Server environment utilizing the Kemp LoadMaster.

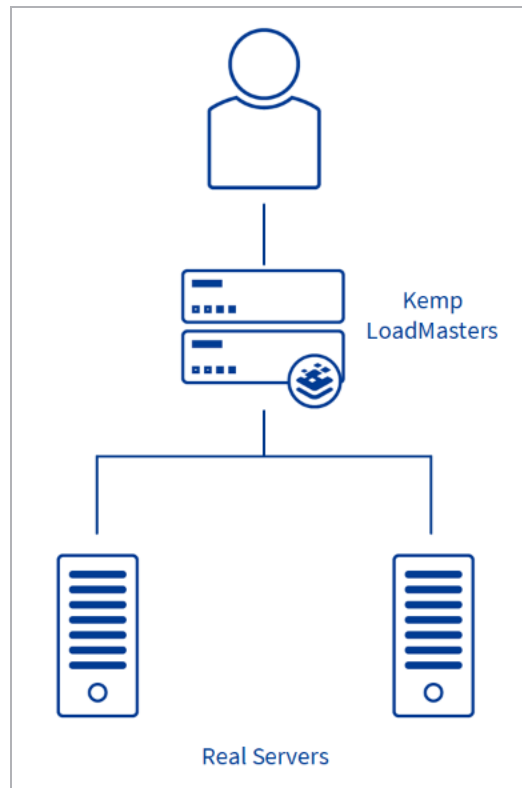

The LoadMaster offers advanced Layer 4 and Layer 7 server load balancing, SSL Acceleration, and a multitude of other advanced Application Delivery and Optimization (ADC) features. The LoadMaster can load balance the Fiserv DNA SAF servers. The LoadMaster intelligently and efficiently distributes user traffic among the application servers so that users get the best experience possible.

This document provides guidance and recommended settings on how to load balance Fiserv DNA SAF servers with a Kemp LoadMaster. The Kemp Support Team is available to provide solutions for scenarios not explicitly defined.

2 Template

Kemp has developed a template containing our recommended settings for this workload. You can install this template to help create Virtual Services (VSs) because it automatically populates the settings. You can use the template to easily create the required VSs with the recommended settings. You can remove templates after use and this will not affect deployed services. If needed, you can make changes to any of the VS settings after using the template.

Download released templates from the **Templates** section on the [Kemp Documentation page](#).

For more information and steps on how to import and use templates, refer to the [Virtual Services and Templates, Feature Description](#) on the Kemp Documentation page.

3 Fiserv DNS SAF Virtual Service

You can configure the necessary Virtual Service in a number of ways; using the template, manually configuring the settings, or using the Application Programming Interface (API). Refer to the relevant section below for further details.

3.1 Create the Fiserv DNS SAF Virtual Service

This step-by-step set up of the VS leverages the Kemp application template for Fiserv DNA SAF.

The table in each section outlines the settings configured by the application template. You can use this information to manually configure the VS or using the Kemp LoadMaster API and automation tools.

To configure a VS using the application template, perform the following steps:

1. In the main menu of the LoadMaster Web User Interface (WUI), go to **Virtual Services > Add New**.
2. Type a valid **Virtual Address**.
3. Select **Fiserv DNA SAF** in the **Use Template** drop-down list.
4. Click **Add this Virtual Service**.
5. In the left-hand navigation select **View/Modify Services**.
6. Click **Modify** on the Virtual Service **Fiserv DNA SAF** on port tcp 10001.
7. Expand the **Real Servers** section.
8. Click **Add New**.
9. Type the **Real Server Address**. (These are the Fiserv DNA SAF servers.)
10. Confirm that port **10001** is entered.
11. Click **Add This Real Server**.
12. Repeat this step to add more Real Servers as needed.

3.1.1 Fiserv DNA SAF Virtual Service Recommended API Settings (optional)

This table outlines the API parameters and values set using the Kemp application template. You can use these settings with scripts and automation tools.

API Parameter	API Value
port	10001
prot	tcp
Schedule	lc
Idletimeout	3600

Last Updated Date

This document was last updated on 22 March 2021.