



Epicor

Deployment Guide

UPDATED: 23 March 2021



Copyright Notices

Copyright © 2002-2021 Kemp Technologies, Inc. All rights reserved. Kemp Technologies and the Kemp Technologies logo are registered trademarks of Kemp Technologies, Inc.

Kemp Technologies, Inc. reserves all ownership rights for the LoadMaster and Kemp 360 product line including software and documentation.

Used, under license, U.S. Patent Nos. 6,473,802, 6,374,300, 8,392,563, 8,103,770, 7,831,712, 7,606,912, 7,346,695, 7,287,084 and 6,970,933

Table of Contents

| | |
|--|-----------|
| 1 Introduction | 4 |
| 1.1 Document Purpose | 4 |
| 1.2 Intended Audience | 4 |
| 1.3 Related Firmware Version | 4 |
| 2 Template | 5 |
| 3 Enable Subnet Originating Requests Globally | 6 |
| 4 Configure Epicor ERP 10 Virtual Services | 7 |
| 4.1 Epicor ERP 10 HTTP | 7 |
| References | 9 |
| Last Updated Date | 10 |

1 Introduction

ERP 10 has been built from the ground up to comprehensively respond to the resource planning needs of enterprises and provide the support organizations require to thrive in today's competitive global business landscape. Guided by the needs of today's organizations, Epicor ERP 10 streamlines the use of Enterprise Resource Planning (ERP) across multiple devices while providing greater deployment choices, reduced complexity, and remarkable ease-of-use.

Such a powerful tool requires reliable and powerful support. The Kemp LoadMaster delivers an exceptional, cost-effective and easy to use solution which, by employing Adaptive Load Balancing, balances requests across Epicor ERP 10.

When deployed as a pair, two LoadMasters give the security of High Availability (HA). HA allows two physical or virtual machines to become one logical device. Only one of these units is ever handling traffic at any particular moment. One unit is active and the other is a hot standby (passive). This provides redundancy and resiliency, meaning if one LoadMaster goes down for any reason, the hot standby can become active, therefore avoiding any downtime. For more information on HA please refer to the: **High Availability (HA), Feature Description**.

1.1 Document Purpose

This document provides guidance on deploying Epicor ERP 10 with a Kemp LoadMaster. The Kemp Support Team is available to provide solutions for scenarios not explicitly defined.

The Kemp support site can be found at: <https://support.kemptechnologies.com>.

1.2 Intended Audience

This document is for anyone deploying Epicor ERP 10 with a Kemp LoadMaster.

1.3 Related Firmware Version

Published with LMOS version 7.2.48.4 LTS. This document has not required substantial changes since 7.2.48.4 LTS. However, the content is in sync with the latest LoadMaster LTS firmware.

2 Template

Kemp has developed a template containing our recommended settings for this workload. You can install this template to help create Virtual Services (VSs) because it automatically populates the settings. You can use the template to easily create the required VSs with the recommended settings. For some workloads, additional manual steps may be required such as assigning a certificate or applying port following, these steps are covered in the document, if needed.

You can remove templates after use and this will not affect deployed services. If needed, you can make changes to any of the VS settings after using the template.

Download released templates from the **Templates** section on the [Kemp Documentation page](#).


For more information and steps on how to import and use templates, refer to the [Virtual Services and Templates, Feature Description](#) on the Kemp Documentation page.

3 Enable Subnet Originating Requests Globally

It is best practice to enable the **Subnet Originating Requests** option globally.

In a one-armed setup (where the Virtual Service and Real Servers are on the same network/subnet) **Subnet Originating Requests** is usually not needed. However, enabling **Subnet Originating Requests** should not affect the routing in a one-armed setup.

In a two-armed setup where the Virtual Service is on network/subnet A, for example, and the Real Servers are on network B, **Subnet Originating Requests** should be enabled on LoadMasters with firmware version 7.1-16 and above.

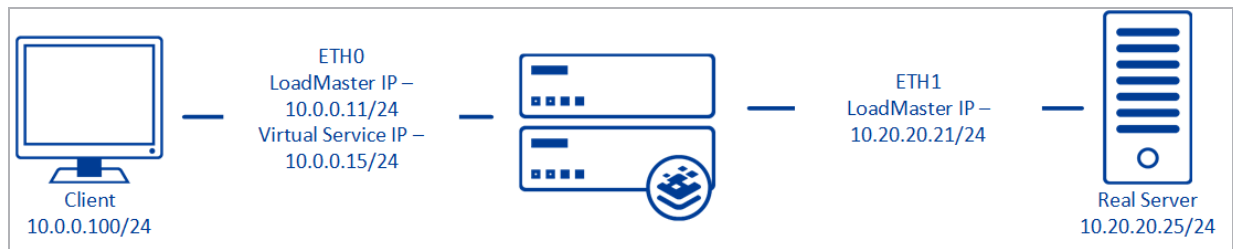

When **Subnet Originating Requests** is enabled, the Real Server sees traffic originating from 10.20.20.21 (LoadMaster eth1 address) and responds correctly in most scenarios.

With **Subnet Originating Requests** disabled, the Real Server sees traffic originating from 10.0.0.15 (LoadMaster Virtual Service address on **eth0**) and responds to **eth0** which could cause asymmetric routing.

When **Subnet Originating Requests** is enabled globally, it is automatically enabled on all Virtual Services. If the **Subnet Originating Requests** option is disabled globally, you can choose whether to enable **Subnet Originating Requests** on a per-Virtual Service basis.

To enable **Subnet Originating Requests** globally, follow the steps below:

1. In the main menu of the LoadMaster User Interface (UI), go to **System Configuration > Miscellaneous Options > Network Options**.
2. Select the **Subnet Originating Requests** check box.

4 Configure Epicor ERP 10 Virtual Services

4.1 Epicor ERP 10 HTTP

The following are the steps involved and the values required to configure Epicor ERP 10 HTTP Virtual Service:

1. In the main menu of the LoadMaster Web User Interface (WUI), go to **Virtual Services > Add New**.

Please Specify the Parameters for the Virtual Service.

| | |
|-------------------------|--|
| Virtual Address | <input type="text" value="10.154.11.131"/> |
| Port | <input type="text" value="808"/> |
| Service Name (Optional) | <input type="text" value="Epicor ERP 10"/> |
| Use Template | <input type="text" value="Select a Template"/> |
| Protocol | <input type="text" value="tcp"/> |

2. Enter a valid IP address in the **Virtual Address** text box.
3. Enter **808** in the **Port** text box.
4. Enter a recognizable **Service Name**, for example **Epicor ERP 10**.
5. Ensure **tcp** is selected as the **Protocol**.
6. Click **Add this Virtual Service**.
7. Configure the settings as recommended in the following table:

| Section | Option | Value |
|------------------|----------|----------|
| Standard Options | Force L4 | Disabled |

| Section | Option | Value |
|---------------------|-----------------------------|---------------------|
| | Transparency | Disabled |
| | Server Initiating Protocols | Normal Protocols |
| | Persistence Options | Source IP Address |
| | Timeout | 2 Hours |
| | Scheduling Method | least connection |
| Real Servers | Real Server Check Method | TCP Connection Only |
| | Checked Port | 808 |

8. Add the Real Servers:

- a) Click the **Add New** button.
- b) Enter the IP address of the ERP 10 server.
- c) Enter **808** as the **Port**.

The **Forwarding method** and **Weight** values are set by default.
An administrator can change these.

- d) Click **Add this Real Server**. Click **OK** to the pop-up message.
- e) Repeat the steps above to add more Real Servers as needed, based on the environment.

References

Unless otherwise specified, the following documents can be found at: <http://kemptechnologies.com/documentation>.

Virtual Services and Templates, Feature Description.

High Availability (HA), Feature Description

Last Updated Date

This document was last updated on 23 March 2021.